

SD-T | Non-Pressurized Solar Water Heater With Assistant Tank

The characteristic:


1. With high quality assistant tank and automatic water supply.
2. Easy to install for flat roof and pitched roof, auxiliary heating by electrical heater.
3. High pressure polyurethane foaming with thickness 55mm.
4. Stable and reliable performance, well wind resistance.
5. SUS304-2B inner tank, silicon seals.
6. High strength galvanized steel bracket.
7. Eco and economical, improves the environment and save your fuel cost.




Working principle:

This model operates to feed water automatically.

Using thermosiphon system- depending on the different density between solar hot water heater and cold water, a water flowing cycle is created in the tubes. Hot water flows automatically upwards while the cold water flows down. The water in the storage tank will be heated from this natural circulation.

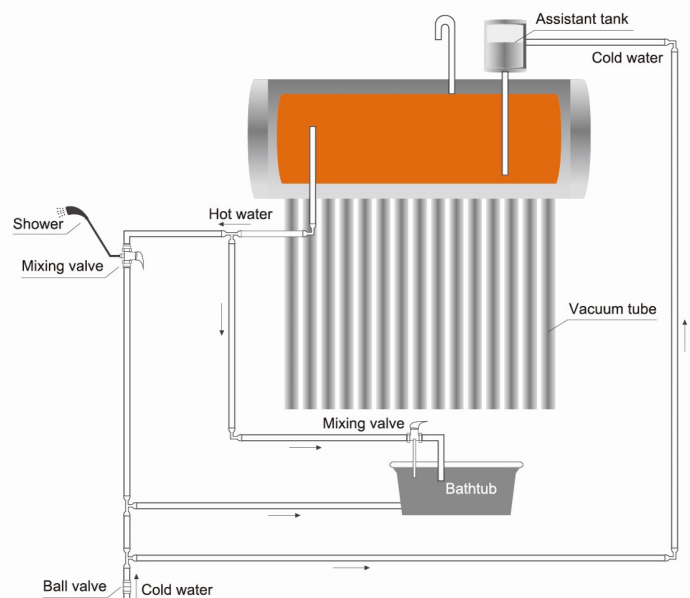

Structure Drawing:

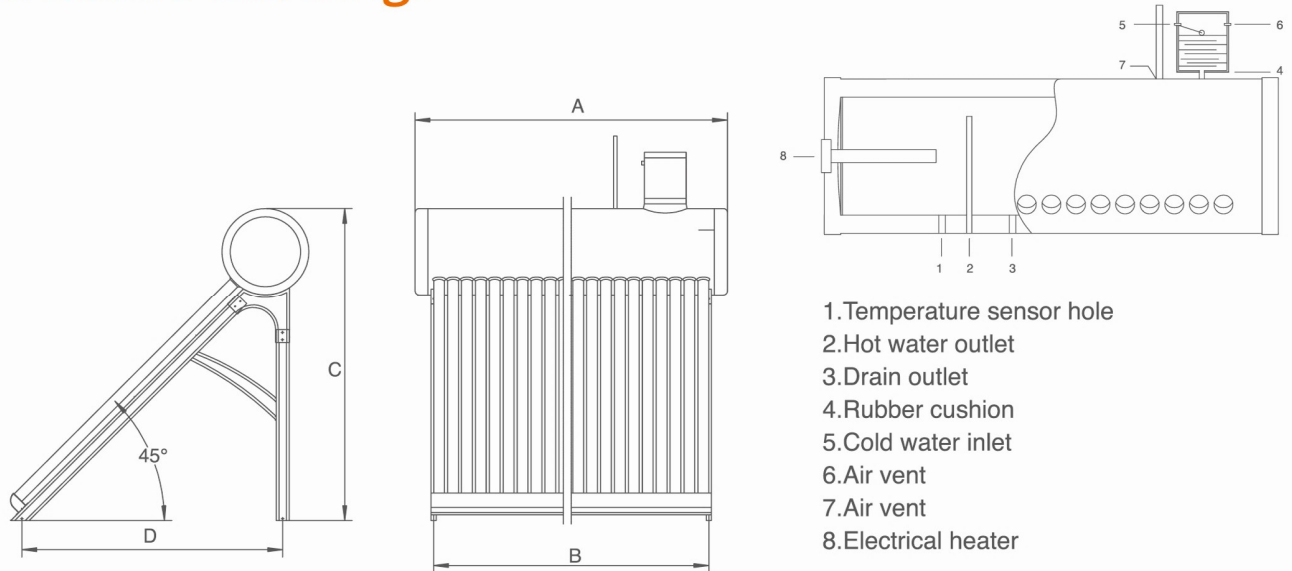

Model	SD-T-15	SD-T-18	SD-T-20	SD-T-24	SD-T-25	SD-T-30
Tube Quantity (pcs)	15	18	20	24	25	30
Water Tank						
Net Capacity (L)	120	140	155	185	195	230
Gross Capacity (L)	155	185	205	245	255	305
Material Of Inner Tank (mm)	SUS304					
Material Of Outer Tank	Color Steel Plate					
Material Of Insulation	Polyurethane					
Vacuum Tube						
Diameter / Length (mm)	Φ58/1800					
Material	High Borosilicate Glass3.3					
Frame	2 Feet (Left-To-Right)			3 Feet (Left-Middle-Right)		
Angle	45°					
Item Size						
A (mm)	1310	1535	1685	1985	2060	2435
B (mm)	1110	1335	1485	1785	1860	2235
C (mm)	1700	1700	1700	1700	1700	1700
C/2 (mm)	—	—	—	892.5	930	1255
D (mm)	1430	1430	1430	1430	1430	1430

AMEC SOLAR

CHANGZHOU MACHINERY & EQUIPMENT IMP.& EXP.CO.,LTD.
 Add : No.62 Xinggang Road Changzhou, Jiangsu 213023 China
 Tel : 0519-83978019 / 83978050
 Fax : 0519-83978999
 http : // www.amecco.com
 E -mail: amec solar@amecco.com

WhatsApp +86-13961191898

WeChat amecco